


# THREAD PREVENT CAPS



PRINTED IN RED

The quantity discount rate is also applicable to alteration cost.  
All price & lead time are to be quoted.

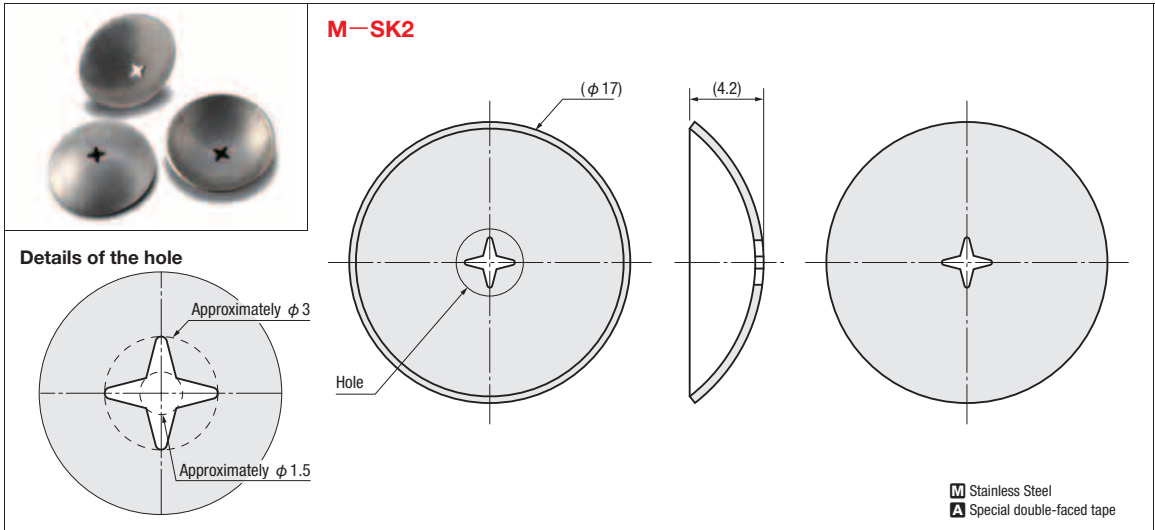

Part Number	10 in one set	
	U/Price 1~5 Set	Slide Unit Price 6~10 Set
<b>M-SK2</b>	<b>Quotation</b>	



Order

Part Number  
**M-SK2**



Delivery

• Printed in Red • Printed in Blue  
SGP Stock **3** Days

※ 10 items come in one set. They are not sold separately.

📍 For area out of Singapore, please refer to P.i.

## Characteristics

- This product prevents sprue threads that occur during molding. (The effect varies by resin.)
- Pressure loss of injection pressure is small and that allows stable molding.
- Easy to mount even when threads occur during a molding trial or after prototyping, because this is a different part from sprue and a nozzle.
- This thin plate easily fits nozzle SR when it is held between the sprue and the nozzle. (Recommended sprue: SR10.5~13, P dimension: 3 and smaller)


## Notes

- If you use glass fiber, the hole may wear with use and that may weaken thread prevention effect.
- The cap may come off if you move the nozzle off because the cap is held between the nozzle and the sprue.



Example

- ① Apply the special double-faced tape on the surface (convex side) of the thread prevent cap.
- ② Attach the cap temporarily to sprue SR.
- ③ Press the nozzle against the sprue.

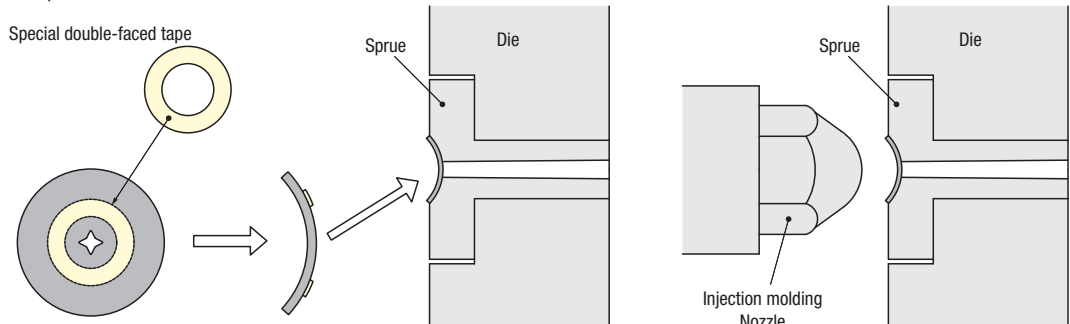

Stocks Availability Subjected to Prior Sales.