
HEAT TRANSACTION PIPES / GREASE FOR HEAT TRANSACTION PIPE



The volume discount rate is also applicable to alteration cost.

All price & lead time are to be quoted.

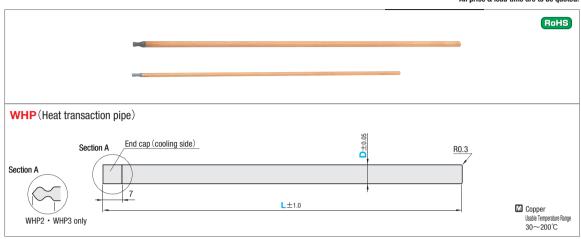

Catalog No.		U/Price
Туре	D	1~9
WHP	2	35 40 45 50 55 60 65 75 85 105 125 145
	3	40 45 50 55 60 65 75 85 105 125 145
	4	50 55 60 65 75 85 105 125 145 165 205 225 Quotation
	6	35 40 45 50 55 60 65 75 85 105 125 145 165 205 225
	8	35 40 45 50 55 60 65 75 85 105



Catalog No.	U/Price
Outding No.	1~9
MTJ	Quotation

■ Features of MTJ Grease

- ①Improves thermal conductivity for the WHP Heat Transaction Pipe.
- ②Is also effective as lubricant for the pipe's attachment/detachment.

■ Specifications


- •Usable temperature range: $-55^{\circ}\text{C} \sim +200^{\circ}\text{C}$
- Net weight: 100g



Catalog No.

L





■ Mounting Method

- ①Make a mounting hole in D+0.1 diameter.
- 2) Provide a water cooling jacket in light of the following:

Depth (ℓ) — L/3 or more Hole diameter — D \times 2 or more

- ③We recommend that the MTJ grease be applied on the heat transaction pipe before inserting WHP into a mold.
- The heat transaction pipe(WHP) must be inserted so that its end cap is on the cooling side.